



UNDERGROUND FIRE HYDRANT WITH HEAT INSULATION HS-1


Production quality system ISO 9001

- Flanged connection DN100
- Pressure PN10 (PN16)
- Automatic drainage system
- Height 1000 mm to 3500 mm (step 100 mm) (higher products are produced under special order)
- Outlet connector 6''
- Main tube insulation
- Drain pipe custom length (2,5 m recommended)

Underground fire hydrant HS-1 for installing into outdoor water pipes for water supply for fire extinguishing, water supply to fire engines and fire extinguishing

Conformity:

EN14339: 2005
EN1074-6:2008
GOST 8220-62

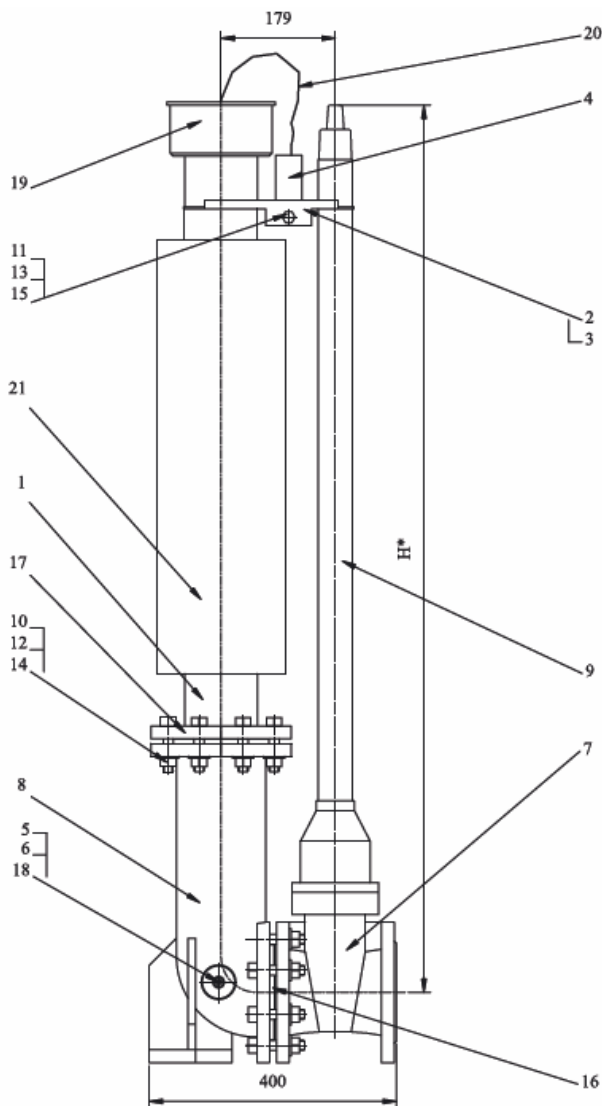

Height, m
1.0
1.1
1.2
1.3
1.4
1.5
1.6
1.7
1.8
1.9
2.0
2.1
2.2
2.3
2.4
2.5
2.6
2.7
2.8
2.9
3.0



- 1 – Tube DN 100 Stainless steel 1.4301
- 2 – Holder - Stainless steel 1.4301
- 3 – Holder - Stainless steel 1.4301
- 4 – Label - Stainless steel 1.4301
- 5 – Valve body - Brass
- 6 – Membrane - EPDM
- 7 – Valve DN100- EN-GJS-500
- 8 – Bend DN100 - EN-GJS-500

- 9 – Axle with coating - Steel Zn
- 10 – Screw M16x70– Steel
- 11 – Screw M8x30- Steel
- 12 – Washer 16- Steel
- 13 – Washer 8- Steel
- 14 – Nut M16- Steel
- 15 – Nut M8- Steel
- 16 – Gasket DN100– Rubber EPDM

- 17 – Flange DN100- EN-GJS-500
- 18 – Screw M6x25- Steel
- 19 – Lid – Plactic PVC
- 20 – Lid fixing - Stainless steel
- 21 – Insulation – Plastic PVC